

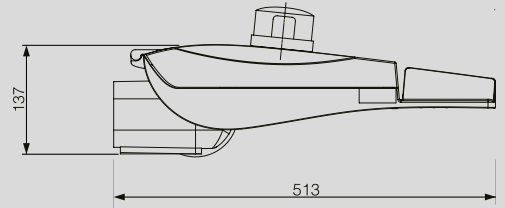


|||| **TERRALED**
MINI

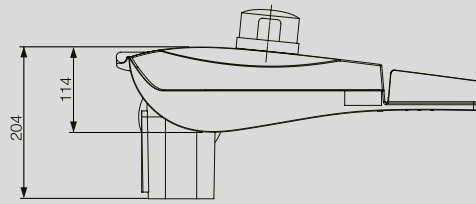


Introducing TerraLED Mini


The TerraLED Mini set new standards for an entry level luminaire. This lantern has been designed to deliver the best photometric output for residential areas coupled with a design that is simple to install and easy to maintain. A compact and robust lantern with versatile performance makes the TerraLED mini the perfect entry level maintenance lantern.

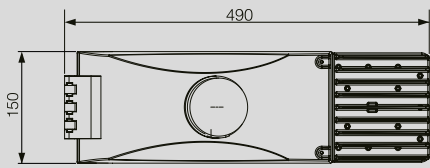


Measurement in millimetres.

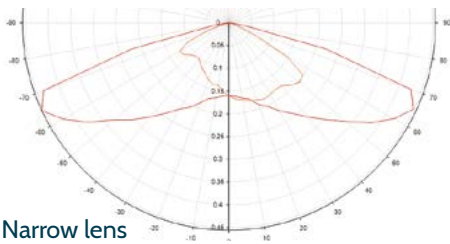

Narrow lens

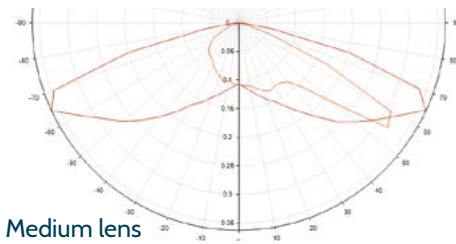

Medium lens

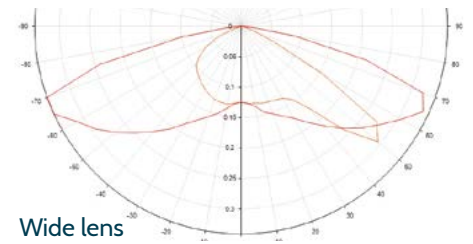

Wide lens

Product Features



SmartCity Ready



Tool Free Access option available



CLO Available



IP66



Up to IK10



Preset Dimming



Surge Protection – 10kV 10kA MLV (clamping voltage) 1.2kV



Tilt angle adjustment +10° to -10°



Lightweight LM6 aluminium

Lantern Information

| | |
|----------------|-----------------------------------|
| Weight | 5 kg |
| Windage | 0.043 m ² |
| RAL codes | Black: RAL 9004 Grey: RAL 9007 |
| Mounting sizes | 76, 60, 42, 34mm |

LED Data

| | | |
|-----------------------------|-----------------|---------------------|
| Lumen output range (Lumens) | Lumens per watt | CCT |
| 1234 - 5480 | upto 132 lm/w | 3000k, 4000k, 5000k |
| LX value | RA/CRI index | |
| L90>100,000 hours | >70 Standard | |

Visit: [www.orange**tek**.co.uk](http://www.orangetek.co.uk)
to find out more or call our sales team
+44 (0)1283 347 792

Photometry



Website



RoHS **WEEE** Compliant



All facts and figures correct at time of printing, subject to change.