

ARIALED II




Introducing ARIALED II

ARIALED II is the latest product from this established and well-loved family of OrangeTek street lights. Designed to cover BS (SS) EN13201 C, M and P lighting classes, using OrangeTek's market leading in-house designed lenses with outstanding optical performance and exceptional uniformity for wet road conditions. As an option Arialed II comes with our 24-led chip "Infinity", delivers outstanding lumen/watt! The ARIALED II is also versatile, being available in high output or CLO optimised LED chip configurations to best suit your needs, for peak performance or hitting energy saving targets.

It has a broad operating lumen range, allowing this lantern to be kept on the shelf and ready use in nearly any location, combined with 'Lumen Boost' to enable you to simply tune your lantern to the desired output quickly and safely to fit your lighting needs.

ARIALED II is designed for maintenance being light to carry and manoeuvre, it enables a fast and simple installation. Designed with an external tilt adjustment mechanism, making it a favourite for contractors.

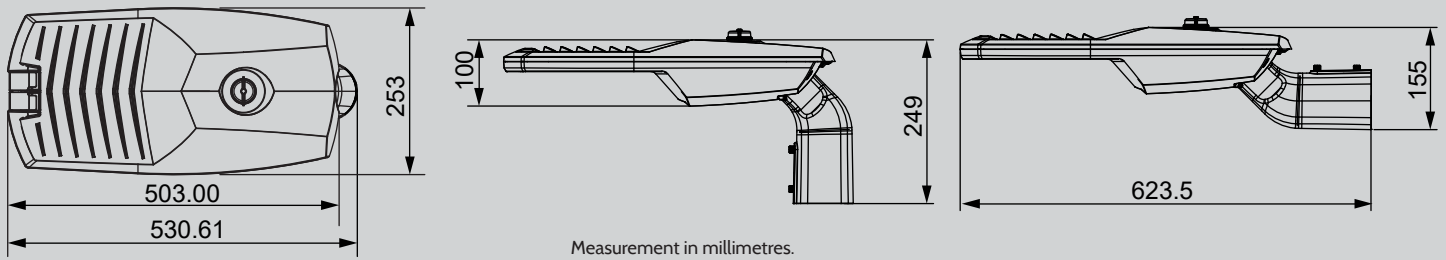


Product Features








1. Glass Cover with variety of lenses .

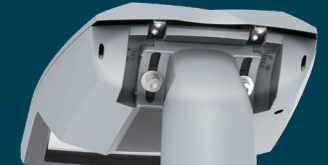


2. Tool free, secure latching power compartment .



3. Exterior tilt angle adjustment.

- 
Tool Free Access
- 
IP66
- 
Upto IK08
- 
Preset Dimming
- 
Tilt angle adjustment +15° to -15°
- 
Lightweight LM6 aluminium
- 
Surge Protection – 10kV 10kA MLV (clamping voltage) 1.2kV

Lantern Information

<p>Weight 5.3 kg</p> <p>Windage 0.045 m²</p> <p>RAL codes Black: RAL 9004 Grey: RAL 7040</p> <p>Mounting sizes 76, 60, 48mm</p>	<p>Lumen output range 370 - 13240 lumens</p> <p>RA/CRI index >70 Standard >80 Available</p> <p>Innovation INFINITY ∞</p> 	<p>CCT Opti 1850K, 2200K, 2700K, 3000K, 4000K</p>	<p>LX value L98 > 100,000 hours</p>	<p>Lumens per watt Up to 170 lm/w</p>
--	---	--	---	--

Visit : www.orangetek.co.uk
to find out more or call our sales Team
+44 (0)1283 347 792

All facts and figures correct at time of printing, subject to change.

